



EDUCTOR

NOZZLES, VENTURI AGITATION

- ELECTROPLATING
- PRINTED CIRCUIT BOARD (PCB)
- METAL FINISHING
- ACID PICKLING
- CHEMICAL ETCHING
- ALUMINUM ANODIZING
- SALTS DISSOLUTION
- MIXING - HOMOGENEOUS SOLUTION

EDUCTOR NOZZLES

VENTURI AGITATION

WORKING PRINCIPLE

The Siebec agitation system with eductor nozzle uses the Venturi principle in order to amplify the volume of liquid delivered by a pump.

Each eductor nozzle can deliver up to 5 times the volume of liquid pumped.

Continuous solution movement is more efficient than air agitation and enables a homogeneous solution.

Eductor nozzles allow better fluid circulation in the tank which enables an enhanced control over the quality of deposition.

Venturi agitation delivers uniform bath temperature.



THE ESSENTIAL ROLE OF AGITATION SYSTEMS



ADVANTAGES

Prevents laminating

Avoids stagnation in the tank and disperses products and reagents

Dissipate the heat

Dissipate the heat from the cathode/electrolyte interface

Reduction of turbulences

Increases the deposition rate

Venturi principle

Multiplies by 5 the volume of liquid pumped

Optimizes deposition properties

Porosity, hardness, resistant to wear and tear



MATERIALS

Molded in one piece

In polypropylene, PVDF or Stainless steel



APPLICATIONS

Suitable for most applications

Electroplating, degreasing, cleaning, pickling, pre-treatment, paint stripping, anodizing, homogeneous solution, mixing, chemical makeup



EDUCTOR NOZZLES

ADVANTAGES

ELECTROPLATING / PRINTED CIRCUIT PLATING

Nickel - Copper - Zinc - Chrome - Gold - Silver & many other chemical processes



90 % LESS TOXIC FUMES

Reduced need for extraction and washing of gases to conform to standards



HOMOGENIZATION

Bath is more homogeneous in both temperature and concentration, in a way that is superior to air or mechanical agitation



ENHANCED CONDUCTIVITY

Reduction of electrical resistance thanks to the absence of air, preventing the loss of conductivity in the solution.



HEATING SAVINGS

Savings on the energy needed to heat the bath (air is responsible for about 25% of energetic losses) thanks to heat losses almost null because of the absence of emanations



IMPROVED WORKING ENVIRONMENT

Reduction of risks for operators and the surroundings

ALUMINUM ANODIZATION



LESS DEFECTS

No external air added which enables a better control over the process.
No carbon dioxide dissolution from air = no air bubble retention in the hollow pieces + no formation of carbonates



REDUCED COOLING COSTS

Thanks to a uniform distribution of the temperature

METAL FINISHING

Alkaline cleaners - Phosphate tank - Paint stripper



LESS FILTRATION

Preservation of brighteners and components of the bath. Reduces the consumption of plating additives and sludge production



LESS CLEANING

Reduction of equipment and infrastructure corrosion by eliminating airborne particles (unlike air agitation). Less cleaning needed around the tanks and electrical equipment

STEEL & AERONAUTICS

Acid pickling - Chemical Etching

EDUCTOR NOZZLES

VENTURI AGITATION



A GOOD AGITATION IS LINKED TO THE FLOW VELOCITY GRADIENT AT THE EDUCTOR NOZZLE OUTLET

An efficient flow field for agitation in critical areas is defined by the minimum flow velocity going from 0.25 to 0.3 m/s depending on the application.


Mechanical agitation only reaches 0.15 m/s

PERFORMANCES

Eductor model	Flow rate	INLET PRESSURE (bar)								
		0.6	0.8	1	1.2	1.3	1.4	1.5	2	2.5
1/4"	Inlet airflow (m³/h)	0.75	0.85	0.94	1.03	1.07	1.1	1.18	-	-
	Outlet airflow (m³/h)	3.95	4.44	4.9	5.36	5.6	5.73	6.15	-	-
	Efficient flow field @ 0.33 m/s (m)	1.22	1.27	1.38	1.49	1.35	1.57	1.72	-	-
	Efficient flow field @ 0.25 m/s (m)	1.47	1.60	1.74	1.89	1.96	2.02	2.17	-	-
3/8"	Inlet airflow (m³/h)	1.30	1.74	1.8	2.0	2.07	2.14	2.2	2.55	2.77
	Outlet airflow (m³/h)	6.73	8.97	9.3	10.4	10.7	11.0	11.1	13.1	14.3
	Efficient flow field @ 0.33 m/s (m)	1.59	1.95	2.1	2.29	2.35	2.41	2.5	2.8	2.9
	Efficient flow field @ 0.25 m/s (m)	1.94	2.39	2.6	2.81	2.90	2.98	3.1	3.5	3.6
3/4"	Inlet airflow (m³/h)	2.71	3.42	3.6	3.95	4.11	4.26	4.4	5.1	5.6
	Outlet airflow (m³/h)	12.1	15.1	15.5	17.5	18.2	18.9	19.8	22.3	24.9
	Efficient flow field @ 0.33 m/s (m)	1.76	2.15	2.2	2.44	2.52	2.59	2.65	3	3.4
	Efficient flow field @ 0.25 m/s (m)	2.26	2.77	2.88	3.14	3.25	3.36	3.5	4	4.6

Simulation conditions : eductor nozzles in 20°C - 1cP water
 Values vary depending on the characteristics of the bath and pressure losses of the system.

FLOW VELOCITY GRADIENT («FEATHER»)

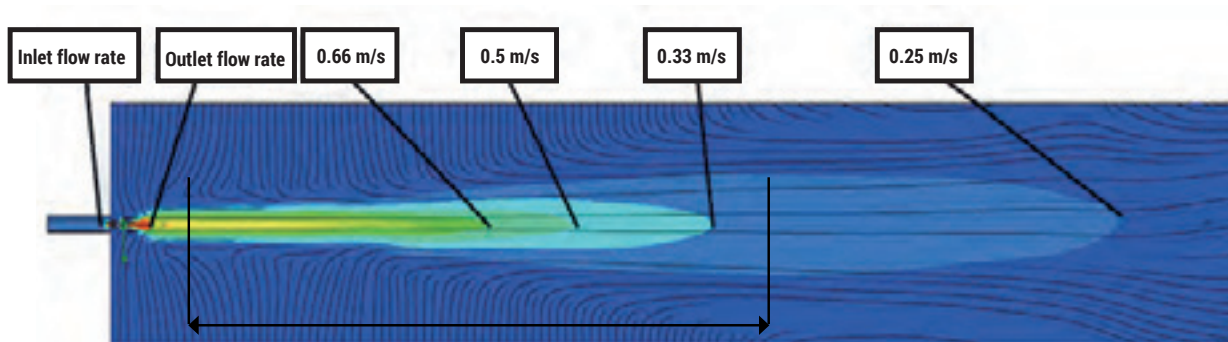

Optimum flow field



EDUCTOR NOZZLES

VENTURI AGITATION

HOW TO CALCULATE AN EDUCTOR NOZZLE SYSTEM PROPERLY ?

1 THE NUMBER OF EDUCTOR NOZZLES

The number of eductor nozzles is determined by the total length of the tank and the typical recommended spacing between eductors according to the table at the bottom of the page.

2 THE SIZE OF EDUCTOR NOZZLES


The size of eductor nozzles is determined by the size of the tank and the space available. Tanks under 300L are often equipped with 1/4" eductor nozzles. Larger tanks are usually equipped with 3/8" eductor nozzles and deep tanks can be equipped with 3/4" eductor nozzles.

3 PIPING DESIGN

The design of the manifold must ensure good movement of solution within the bath and prevent direct impingement when electroplating. Stripping or cleaning applications can handle stronger turbulences directed at the product being treated.

4 SIZE OF THE PUMP

The size of the pump is calculated depending on the number and size of the selected eductor nozzles, the depth of the tank, as well as the piping.

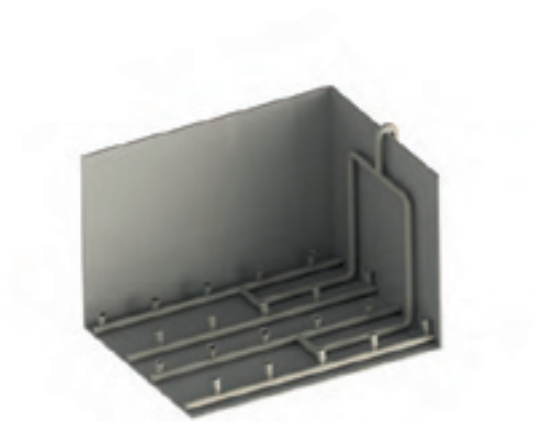

H LAYOUT



O LAYOUT

Modeling of eductor nozzles layout in a treatment bath

Eductor size	Recommended center distance (mm)
1/4"	200
3/8"	300
3/4"	400



EDUCTOR NOZZLES

VENTURI AGITATION



OPTIMIZATION OF YOUR AGITATION SYSTEM

We can help you in the calculation of the number and size of the eductor nozzles and design the installation of your agitation system. Our flow simulation software allows us to reach an optimized agitation in your tank.

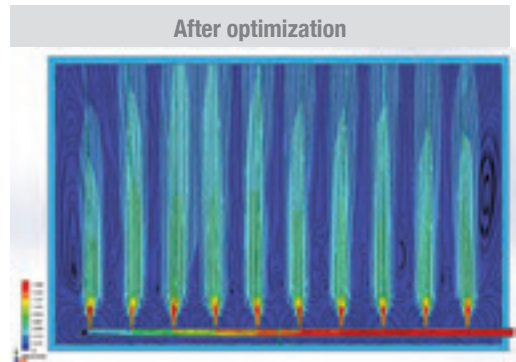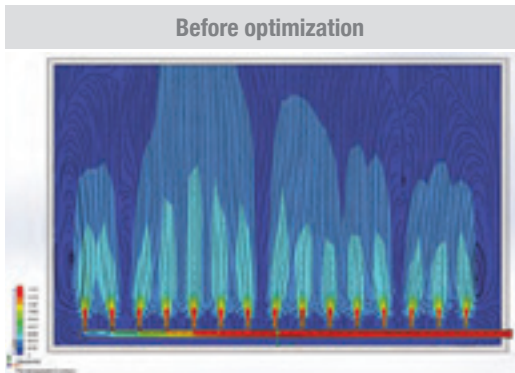


SIEBEC pump M390 | Height of the tank : 2 m | Eductor nozzle : 3/8"


EXAMPLE : SIMULATION OF SAVINGS

comparison between an air agitated system and Venturi agitation

Tank volume	Bath temperature	Air temperature	Power absorbed Venturi agitation	Power absorbed Air agitation
5m ³	60°C	20°C	12 kW	15 kW

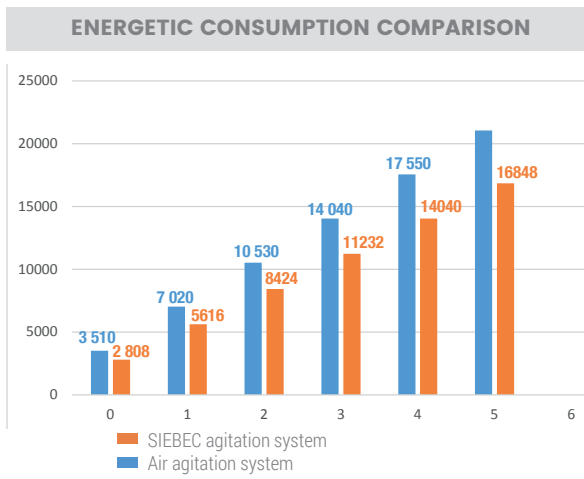

-24 % EVAPORATION

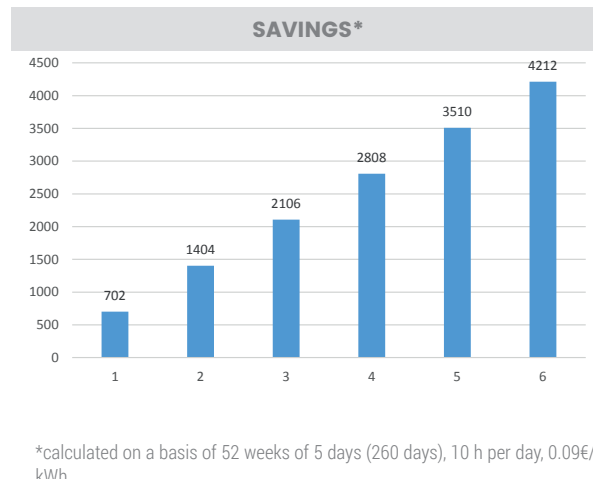

*calculated on a basis of 52 weeks of 5 days (260 days), 10 h per day, 0.09€/kWh

20 % SAVINGS*







EDUCTOR NOZZLES

VENTURI AGITATION

FLOOR SPACE, DIMENSIONS, MATERIALS

MODEL	MATERIAL*			DIMENSION (mm)			FLOW RATE (m ³ /h)
	PP	PVDF	Stainless steel	Thread length L	Thread length P	Ø Outlet A	Outlet airflow
1/4"	•	•		72	11	26	3.1 to 6.15
3/8"	•	•	•	100	16	53	6.35 to 14.3
3/4"	•	•		144.5	20	71.3	11 to 27.45

* Polypropylene (Max temperature of the fluid: 80°C) - PVDF (Max temperature of the fluid: 110°C).

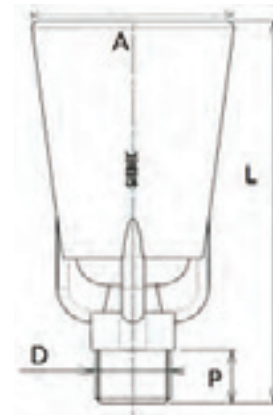

PUMPS FOR EDUCTOR NOZZLE AGITATION SYSTEM

MODELS	ENGINE POWER (kW)	MAX FLOW RATE (m ³ /h)	MAX TOTAL HEAD (m)
Magnetic drive pumps			
M200	1.1	20	19
M250	1.5	25	19
M290	2.2	29	21.5
M390	4.0	40	23
Mechanical seal pumps			
A27	2.2	30	25
A30	4	48	25
A31	5.5	52	32
A32	7.5	57	50
Vertical pumps (SIEBEC) – outside of tank or immersed			
T202	1.5	18	17
T242	1.5	23.5	17
T262HD	3	29	18.5
Vertical pumps (Bohncke GmbH) – immersed			
S17	3.0	25	32.5
S18	4.0	40	32.5

MAGNETIC DRIVE PUMPS
MECHANICAL SEAL PUMPS
VERTICAL PUMPS



SIEBEC - A30



BOHNCKE - S18



To know the complete specifications (alternative constructions, air flow charts, dimensions, etc.)

CONTACT US !



101 Lindenwood Drive, Suite 225 • Malvern • Pennsylvania 19355
T 484.875.3068 • F 484.875.9273 • E sales@specialty-plastics.com

Your Engineering Plastics Experts

Our experts can provide complete solutions to your fluid handling problems. We are highly knowledgeable about the various types of engineering plastics available, and we can help you determine what materials or products are best suited for your specific process. We can manage the project for you, from start to finish, or we can advise you on certain aspects of your project.

Our Expert Services Include:

- Product Selection
- Material Selection
- Specification Assistance
- Engineering and Design
- Technical Support
- Plastics Testing
- Consulting Services
- Project Management
- Feasibility Studies

Complete Filtration Systems for Your Plating and Industrial Applications

Specialty Plastics SIEBEC offers Complete Molded Filtration Systems—made with PP or PVDF—featuring superior corrosion resistance for your plating and industrial applications. SIEBEC systems have provided solutions in applications for over 60 years worldwide.



CARTRIDGES • PUMPS • FILTERS • EDUCTOR NOZZLES

(Including high-capacity L-TECH pleated reusable cartridges)

Four-Point Guarantee*

- Performance
- Manufacturing
- Satisfaction
- Price



Reducing Cost of Ownership • Speedchange Assembly in 30 Seconds* • Reusable Filter Cartridges
Magnetic Drive Pumps • Mechanical Drive Pumps • Vertical Pumps

*Contact us for details.